


you will find this page in PDF-format in the movies/papers section

stairBOT can

- drive back and forth (,).
- pivot and turn,
- drive over small obstacles (up to 4 cm).
- climb regular stairs^{*)} up and down.

because of the following design items....

- differential-drive,
- big wheels (25.5cm),
- omniwheels as castors,
- brakes at the omniwheels,
- variable size, and a support.



^{*) even with nosings/edges and open risers, minimum run length = 25cm, maximum slope = 37°.}

Brief description	Principal data
stairBOT is a small robot for indoor environments. On even floor it drives like many other small robots with a differential-drive. In addition it can change its length - together with linear guides mechanism with a spindle-drive. By this mechanism it can - together with its omniwheels (with brakes) and a support - reliably climb up and down regular sized stairs. It was one of the objectives for the design to use as few actuators and sensors as possible.	length min/max
	63cm / 30cm
	height min/max
	27cm / 60cm
	width
	37cm
mass	
6 kg	
actuators	
5	
sensors for stair climbing	
6	

Who wants to learn more, is invited, to read

beneath


The stairBOT - Concept**Objectives**

A robot, which


- can reach every freely accessible place in a building;
- is not longer than 50 cm;
- needs as few actuators and sensors as possible;
- can be controlled by simple control-structures.

The Stair Problem

A robot which moves freely in a building has to be adapted to an environment made for humans. On its way it may encounter small obstacles (up to 4 cm of high, e.g. door steps, sills etc.) and stairs. These stairs often have nosings or ledges and sometimes open risers. The slope of indoor stairs can vary between 25° and 42°. Sometimes you will find in residential buildings even steeper stairs, especially spiral stairs. In public buildings stairs often have a rise s of 17cm and a run a of 29cm (slope approx. 30°)



a = run s = rise u = nosing/ledge



b = limit of safe stairclimbing for humans

c = maximum slope for stairBOT

d = "ideal" stairs in public buildings

^{*) I can't find the correct english word. Some papers dealing with stair climbing robots use "ledges". On the other hand "STAIR SAFETY. A Review of the Literature and Data Concerning Stair Geometry and Other Characteristics", a paper prepared for U.S. Department of Housing and Urban Development, did not use the word "ledge" at all, but you will find a lot about safety risks caused by "nosings".}

stairBOT can negotiate stairs with a run length a not smaller than 25cm and a maximum rise s of 20cm. Thanks to its big wheels are nosings and open risers no problem.

Well-known Stair Climbing Robots


If you search the internet, you will find quite a number of stair climbing robots. There are the famous two-legged robots (e.g. *Asimo*, *HRP2*), six-legged robots (e.g. *RHex*), and tracked robots, mainly in military or law enforcement applications (e.g. *Urbic*, *packBot*). Looking for wheeled robots you will find only a small selection. Best known probably *shrimp* of the EPFL Lausanne. *Helios V* also climbs up and down stairs. There are also some hybrid designs with rotating legs, a mixture of a wheel and a 1-DOF-leg: *whegs*, *whegsil* and *mini-whegs IV* (and *RHex*). *Mini-whegs IV* uses yet another concept: It jumps from step to step.

As impressive these robots are, according to the objectives mentioned above they also have some drawbacks. Either they are very complex and thus expensive, or they use tracks (not very appropriate to indoor environments) or some designs have problems with nosings and open risers (e.g. *shrimp*). Even *RHex*, (my favorite stair climber: more than 200 steps of Montmartre-stairs in Paris or fire escape stairs, slope 42°!) can only show its outstanding performance, if it appropriately hits the first step. At least downstair *RHex* has to be placed manually in the right starting position and the stairs should not have large nosings and open risers. Actually you will find only few robots climbing downstair.


In the amateur area are successful stair climbers too, for example the Lego robot *Pitzneugneu*. It climbs stairs in both directions, but it is not well suited for floors, due to its design especially developed for stair climbing.

1.1 Moving on the Floor**1.1.1 The differential drive**

Most of the time an indoor robot will move on even floors. The differentialdrive is an easy to handle concept for such a situation. Thus **stairBOT** uses this drive concept too. Because of its stairclimbing ambitions the castor was replaced by two omniwheels.

**1.2 Moving on Stairs****1.2.1 Wheel diameter**

The wheel diameter should be big enough, that the wheel could not be blocked by nosings and stairs with open risers. A wheel diameter of 25cm enables the robot to climb stairs with 20cm rise. With a bigger rise and very small ledges (t in the drawing) the danger of a blocked wheel will increase.



D = 255mm stairBOTs wheel diameter

(the smaller circle with the dashed line shows the wheel diameter of the EPFL *shrimp* -Robot)

1.2.2 Push the wheel upstairs

How can this big wheel be moved on next step? **Push it upstairs!**

To simplify things a little bit, let's consider that the center of mass is located in the middle of the wheel. So we get the following:

The wheel will be pushed upwards, by a force supported lateral to the center of mass. As a result we will also have a force component normal to the step. So a driven wheel can contribute to the upward move. That will only work as long as the support will stay in place in spite of the horizontal reaction force.



The consequence are problems


- of static friction,
- of the right balance between the different masses,
- of the adjustment of the wheel speed and the speed of the linear guides.

1.2.3 Omniwheels with brake

This differentialdrive robot uses omniwheels as castors when driving on the floor. Climbing upstairs these omniwheels are at the bearings for the linear guides whilst pushing up the wheels. They have to stay in their position against the horizontal reaction force. Brakes prevent the turning of the omniwheels, which should provide a sufficient wheel grip.

1.2.4 The support

Has the wheel reached its position on the upper step, the omniwheels can be pulled up. Especially at the beginning of this movement the lever arm of the rear masses is rather long. To prevent that the robot topples over or simply slide backwards down the step, it gets an additional support. In addition the adherent covering of the support inhibits a backward movement

**1.2.5 Speed adjustment of wheel and linear slide**


The adjustment of the wheel speed and the speed of the spindle drive of the linear guides has proven as crucial. To slow or to fast, always is the result that the friction between the omniwheels and the floor will not be sufficient enough to hold the wheels in position against the horizontal reaction forces, the robot falls down. For the build robot a working combination of the two speeds was found by trial and error.

1.2.6 Perpendicular to the step


To "drive" stairs safely the orientation to the step is another important issue. For most of the robots (e.g. small tracked robots) it is best to start with and to hold a perpendicular orientation to the step. To recognize its orientation to the edge of the step, the robot should have appropriate sensors in a symmetrical configuration.

1.3 Concept of stair climbing**1.3.2 one step up**

- approach - recognize the stairs - short position - drive towards the first step until the wheel-bumpers hit the edge of the step - main wheels stop - apply the brakes - linear guides start moving to the long position - concurrently start the main wheels with synchronized speed - release the brakes when the linear guides are in the long position (= main wheels on step) - drive forward until the wheel bumpers hit the next step (= the linear guides bumper hit the edge of the step - main wheels stop - the linear guides move to the short position to pull the omniwheels up (the robot is resting on its main wheels and the support in this phase) - when the linear guide is in the short position the support is folded and the robot rests on its omniwheels again.

**1.3.2 one step down**

Same procedure running backwards. For that purpose the robot has to turn 180° after it recognized a downwards leading step. With its omniwheels ahead the robot approaches the step. The descent is only controlled by the two rear IR-sensors (GP2D120).

**2.0 The design****2.1 Dimensions and distribution of masses**

To climb stairs the robot has to be:

- small enough, to fit into the length of a step,
- long enough, to span the distance of two steps.

To meet these conflicting requirements **stairBOT** was engineered as a differentialdrive robot of variable size.

Therefore it was built of two relocatable units:

- the wheel-unit with the main drive and the support,
- the linear-guides-unit with spindle drive, omniwheels and sensor head

wheel-unit

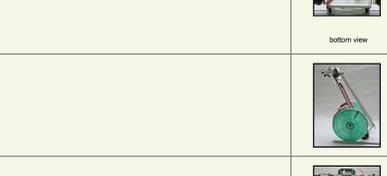
(with center of mass)

linear-guides-unit

(with center of mass)

Position of the sensors:

- IR-sensor front
- (tiltable sensor head)
- Wheel-bumper
- linear-guides-bumper
- IR-sensor rear

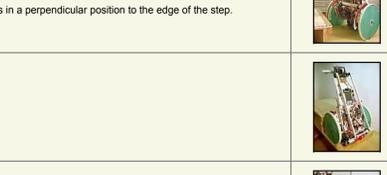


Total mass is splitted pretty evenly to both units. The approximate position of the centres of mass for both units is shown in the drawing. The prototype of **stairBOT** has a total mass of approx. 6 kg. 20% of the total mass are contributed by the batteries. The distribution of the batteries is the easiest way to balance the robot.

Note: material

The prototype of **stairBOT** was build from fischertechnik construction kit parts (mainly: linear guides, spindles, microswitches), aluminum- and plastic profiles and plywood.

The green wheels are made from movable castors for floorports. To increase the adhesion of the wheels they are pasted up with flexible sliding strips for windows (see-note, 5mm).

**2.2 The wheel unit**

With a wheel diameter of 255 mm the drive wheels are significantly larger than the wheels of robots of comparable size.

The robot uses two 6 Watt DC motors with built-in 16:1 planetary geartrains and 84:1 planetary gearboxes. An extra gear reduction stage yields a total reduction of 224:1. The motors are controlled by PID-controllers via 3A H-Bridges.

A foldable support is mounted on the wheel unit to hold the robot on a step when the linear guides with the omniwheels are moved up or down. The wheel unit is mounted like the carriage of a linear motion system.

2.3 The linear guides unit

The wheel unit can be moved along the linear guides by a leading screw (pitch 5mm, travel 290 mm). The drive motor is a DC-Motor (11Watt, 4.8:1 planetary gearbox, encoder). The motor is controlled by a PID-controller via a 3A H-Bridge. Additionally two limit switches are used for termination and calibration. With this mechanism the length of the robot is continuously adjustable between approx. 60cm and 30cm.

As castors two 60 mm omniwheels (TRAPO, polyurethane) are used.

2.4 Sensors for stair climbing

To recognize the steps, its orientation to the step and the position on the step the robot is equipped with the following sensors:

#	mounting	right	left	typ	direction	function
1	front	x	x	80cm IR ranger Sharp GP2D12	up / down	beginning of the stairs
2	front	x	x	micro switch (wheel bumper)	up	wheel at step edge
3	central	x	x	micro switch (linear guides bumper)	up	linear guides touch step edge
4	rear	x	x	30cm IR ranger Sharp GP2D120	down	recognize step edge

To climb the stairs only sensors # 2, 3 and 4 are necessary. To provide for the perpendicular orientation of the robot to the step these sensors are symmetrically mounted on both sides of the robot. If for example the left wheel reaches the edge of a step the left driving motor is stopped while the right motor still runs until the right wheel reaches the edge too. Thus the robot can climb spiral stairs - if the run is long enough.


Sensors 1 are mounted on the tiltable sensor head. The sensor head preserves a given line of sight, because its adjusting servo gets a feed back of the actual spindle drive position.

In addition to the two GP2D12s the sensor head is equipped with a CMUCam2 and a SRF08 ultrasonic sensor. These both sensors are not used for stair climbing.

2.5 Design details

Both omniwheels use simple disc brakes. The brake is made from a flexible plastic part covered by a lining (black/red) normally used for table-tennis bats (← ping-pong paddles for american readers).

Moving the servo mounted cam pushes both brake discs (via the rods) against the omniwheels. The brakes will be released by retaining springs. The polyurethane-rollers of these wheels (60mm TRAPO-rollers) provide sufficient adhesion even on smooth ground.

**mechanical design: side view****mechanical design: front view**

(still with long sensor girder with two SRF08)

Approaching the first step

Ascent would not start until the robot is in a perpendicular position to the edge of the step.

On the first step**On the step, 1 motor removed**

You can see the function of the support and the positioning of the 6V-batteries.

Sensor head

The sensor head is equipped with 5 sensors (2 GP2D12, 1 SRF08, 1 CMUCam2)

It can be adjusted in any linear guides position in a wide range from perpendicular to (e.g. to find landmarks), a subset of the ANSI-C. For data transfer between the 4 mCs an I2C-bus is used. One of the microcontrollers is configured as a router. This router has a serial link to the host. The elements drawn with dashed lines are already mounted for a more realistic weight distribution but not working yet. At the moment the robot is still tethered to a desktop-PC as a host. Router-mC and host communicate via RS232.

3.0 Control-electronics

The robot is equipped with 4 micro-controllers. mC2 and mC4 are PID motor-controllers. mC1 and mC3 are used to handle the analog and digital inputs of the sensors and to control the servos. The mCs are programmed in TEA (proprietary acronym), a subset of the ANSI-C. For data transfer between the 4 mCs an I2C-bus is used. One of the microcontrollers is configured as a router. This router has a serial link to the host. The elements drawn with dashed lines are already mounted for a more realistic weight distribution but not working yet. At the moment the robot is still tethered to a desktop-PC as a host. Router-mC and host communicate via RS232.

4.0 Specifications

Processors 2 BrainStem GP 1.0 (acronym, USA)
2 Brainstem Moto 1.0 (acronym, USA)

1 iPAQ

Sensors 1 CMUCam2

2 GP2D12 range finders (front)

2 GP2D120 range finders (rear)

1 SRF08

2 micro switches (wheel-bumper)

2 micro switches (linear guide bumper)

2 micro switches (limiting switches for the spindle drive)

Power 11 SubC NiMH 3000Ah(13.2V) motor

5 SubC NiMH 3000Ah(6V) servos

5 SubC NiMH 3000Ah(6V) controllers

1 iPAQ LiIon-Battery

Drive Type 2 wheel differential drive (2 omniwheels with brakes as castors)

1 linear guides with leading screw

Actuators 2 DC-motors 6W, 84:1 geartrain, encoder (differential drive)

1 DC-motor 11W, 4.8:1 geartrain, encoder (spindle drive)

1 servo (omniwheel-brake)

1 servo (support)

1 servo (sensor-head up and down)

Body fischertechnik construction kit parts, custom made aluminium, plastic and plywood parts

Seize depending on linear guides position

L x W x H:

short: 30cm x 36cm x 60cm

long: 65cm x 36cm x 27cm

Weight about 6kg with batteries

G. Wendel, Dezember 2004